



# Electrolux

## Modular Cooking Range Line 900XP 2 Drawer Ref-freezer Base

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_


NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_



Electrolux

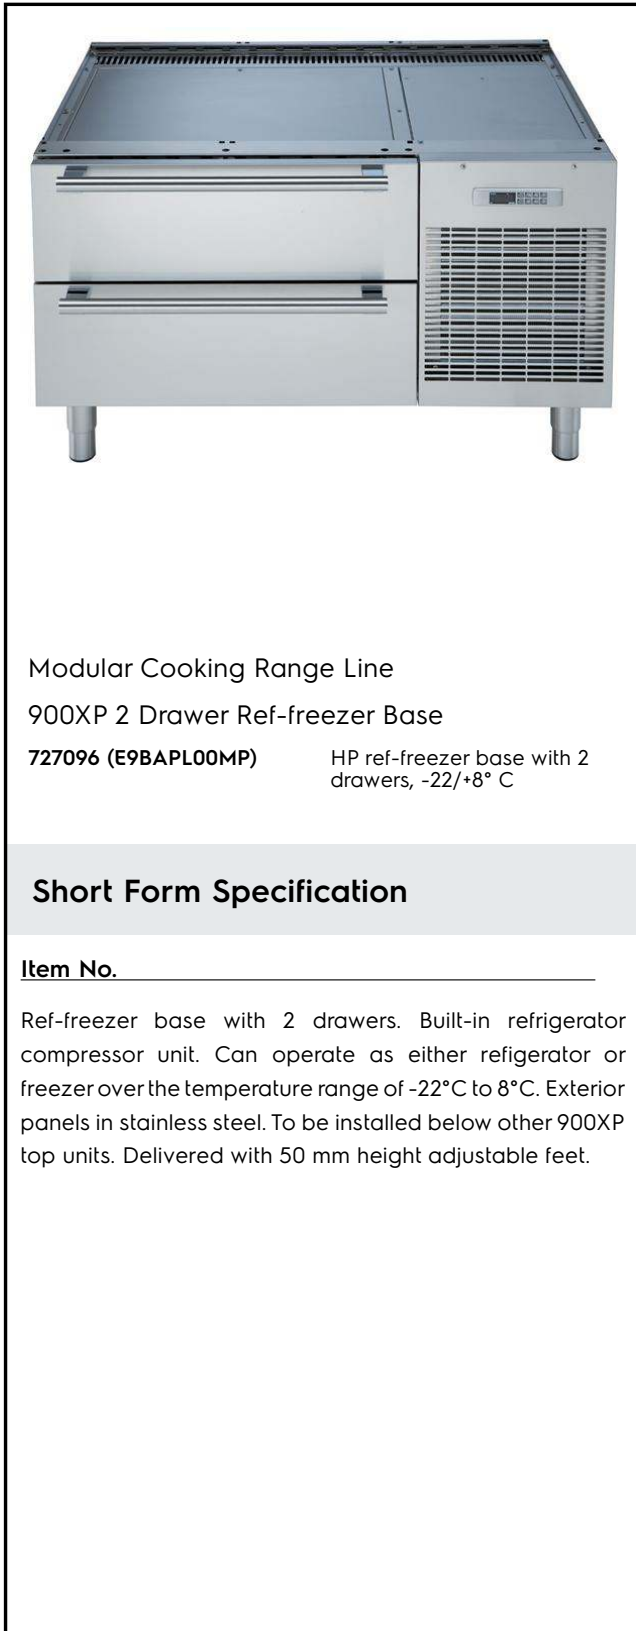

Modular Cooking Range Line  
900XP 2 Drawer Ref-freezer Base

**727096 (E9BAPL00MP)** HP ref-freezer base with 2 drawers, -22/+8° C

### Short Form Specification

**Item No.** \_\_\_\_\_  
Ref-freezer base with 2 drawers. Built-in refrigerator compressor unit. Can operate as either refrigerator or freezer over the temperature range of -22°C to 8°C. Exterior panels in stainless steel. To be installed below other 900XP top units. Delivered with 50 mm height adjustable feet.

### Main Features

- Exclusive IcyHot installation: combine the gas PowerGrill HP top or the gas Fry Top HP 1200 mm with the dual temperature refrigerated/freezer base HP and obtain a single appliance which simultaneously increases productivity and facilitates cooking and storage operations.
- Unit delivered with 50 mm height adjustable feet in Stainless steel.
- Suitable for use in ambient temperatures of up to 43 °C.
- Adjustable temperature range from refrigerated to freezer mode (-20°C to 10 °C) to suit meat, fish and dairy storage requirements.
- Two drawers to accept 1 GN2/1 containers each (maximum height 100mm) or imperial-size pans.
- Heavy-duty stainless steel tubular drawer handles.
- Easy to remove drawer guides feature safety stop and are capable of sustaining up to 120kg.
- Removable magnetic snap-in drawer gaskets.
- Perforated top surface and bottom plate allow for a better air circulation.
- Forced air circulation for rapid cooling and an even temperature distribution.
- Front panel in stainless steel with built-in stainless steel wire netting can be easily removed to access components and facilitate cleaning.


### Construction

- Constructed in Stainless steel with Scotch Brite finish to meet the highest hygiene standards.
- Built-in compressor to suit operating conditions.
- CFC free (ecological refrigerant type: R404a, - gas in foam: cyclopentane).

### Optional Accessories

- 4 wheels - 2 with brake for refrigerated/freezer base PNC 880123
- Pair of side kicking strips for refrigerator base PNC 880221
- Support GN container for refrigerated/freezer base PNC 880249
- Frontal kicking strip for freezer/refrigerated base PNC 880336

APPROVAL: \_\_\_\_\_

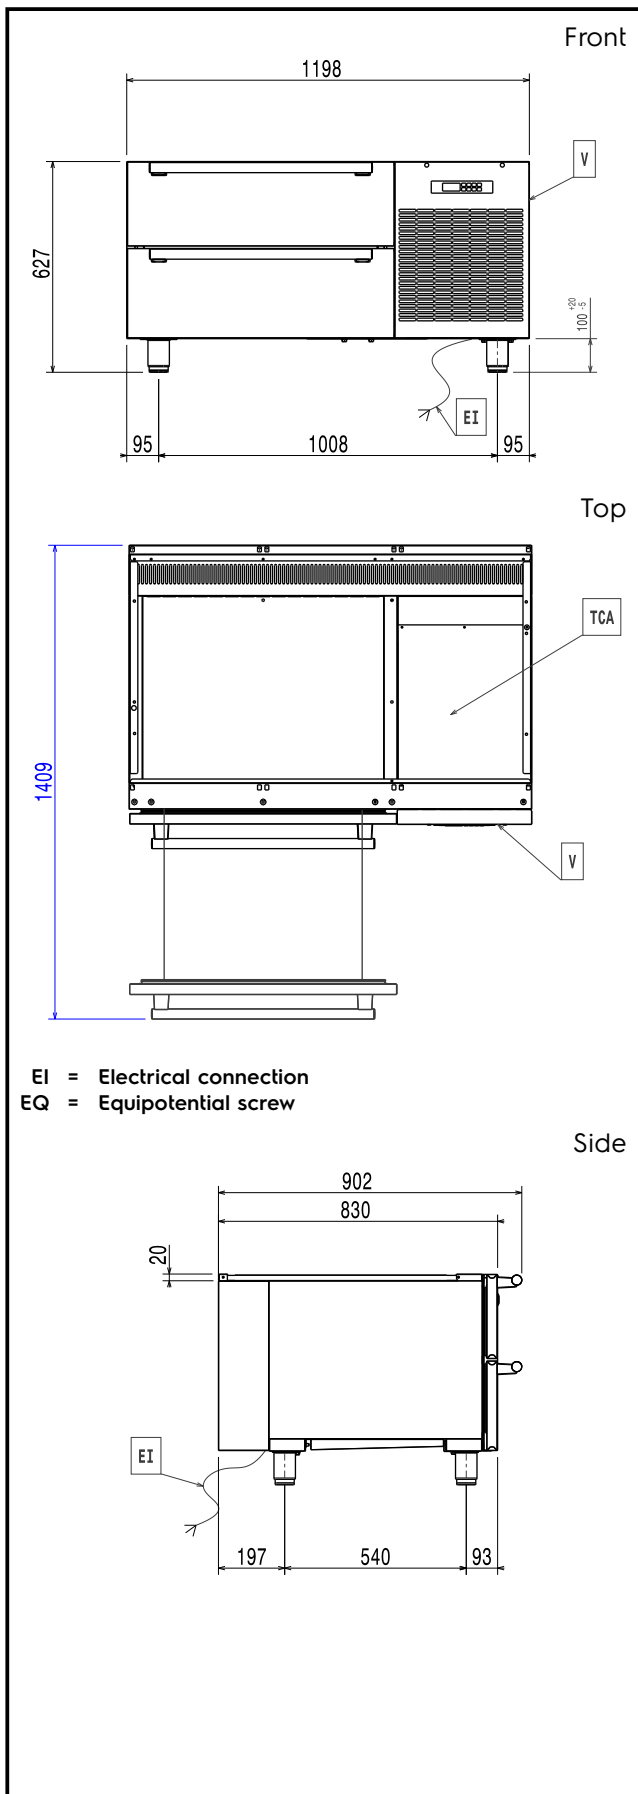
**Electric**

<b>Supply voltage:</b>	<b>727096 (E9BAPL00MP)</b>	230 V/1 ph/50 Hz
<b>Electrical power:</b>		0.74 kW
<b>Total Watts:</b>		0.74 kW

**Key Information:**

<b>External dimensions, Height:</b>	679 mm
<b>External dimensions, Width:</b>	1198 mm
<b>External dimensions, Depth:</b>	902 mm
<b>Gross capacity:</b>	
<b>Net weight:</b>	118 kg
<b>Shipping weight:</b>	125 kg
<b>Shipping height:</b>	790 mm
<b>Shipping width:</b>	980 mm
<b>Shipping depth:</b>	1300 mm
<b>Shipping volume:</b>	1.01 m <sup>3</sup>

**Refrigeration Data**

<b>Compressor power:</b>	3/4 hp
<b>Refrigerant type:</b>	R404a
<b>Refrigeration power:</b>	1913 W
<b>Refrigerant weight:</b>	305 g